

PA370 EXPRESS PU WOOD ADHESIVE

LOW LOW ODOUR
PRESS TIME Nonshrinking
Extremely
high bond strength

Conforms to D4 according to DIN EN 204



Low Clamming



Excellent
Bonding



Fast Curing



Waterproof



Akfix®

**Creates
Permanent
Solutions**

www.synergysalesgroup.net

PA370 EXPRESS PU WOOD GLUE TRANSPARENT

PROPERTIES

Fast curing. Low press time. Transparent.
Extremely high bond strength on numerous substrates.
Conforms to D4 according to DIN EN 204. Easy to use.
Very good resistance to chemicals.
Excellent resistance to moisture and weather conditions.
Nonshrinking. Low odour. Useable in slightly wet substrates.

APPLICATION AREAS

Fixing and gluing wooden elements to other various porous and non-porous elements as wood, metal, concrete, polystyrene foam etc. Furniture and boat production. All bonding applications that need a high water resistance.



Low Clamming




Excellent Bonding



Fast Curing



Waterproof

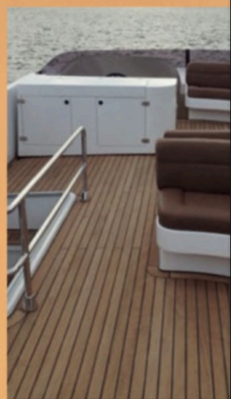

Synergy Sales Group

www.synergysalesgroup.net

info@synergysalesgroup.net